




HI-LITE MFG. CO., INC.

13450 Monte Vista Avenue
Chino, California 91710
Telephone: (909) 465-1999
Toll Free: (800) 465-0211
Fax: (909) 465-0907
www.hilitemfg.com

Job Name: _____
Type: _____
Quantity: _____

Item Number	Height (A)	Width (B)	Post Fitter (C)
H-60118-P	25"	18"	3"
H-60122-P	30"	21"	3"
H-60218-P	25"	16"	3"
H-60222-P	30"	19"	3"

For Post Mount Only

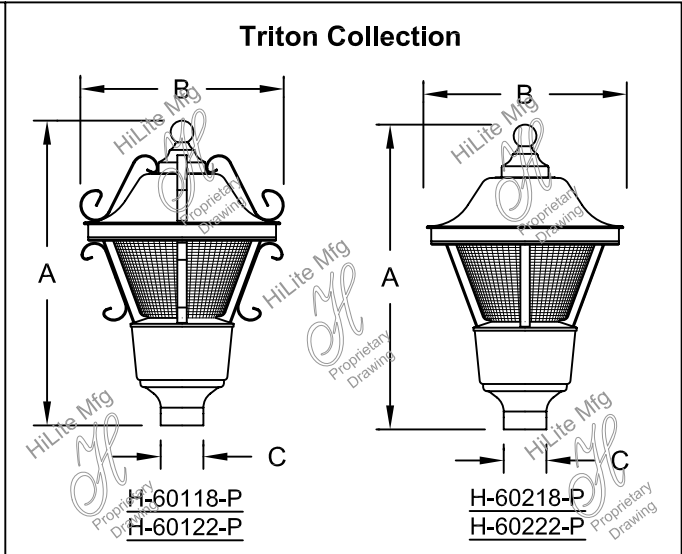

Fixture No.	Fixture Color	Globe	Refractor Type	Wattage/Lamp options	Ballast	Voltage
H-60118-P ⁽¹⁾	Standard	AC ⁽²⁾ (Acrylic)	Light ⁽³⁾ Distribution	Incandescent ⁽¹⁾ ⁽⁴⁾ (Fixture is standard 200W. Do not specify.)	Ballast option not available for INC.	Incandescent (Fixture is standard 120V. Do not specify.)
H-60122-P ⁽¹⁾	91 (Black)	PLY ⁽²⁾ (Polycarbonate)	T3 (Type 3) T5 (Type 5)	CFL ⁽⁴⁾ (Compact Fluorescent)	OBB (Onboard)	CFL
H-60218-P ⁽¹⁾	95 (Dk. Grn)			13/CFL	OBB (Fluorescent Options 13W-85W)	M (Multi 120/277V)
H-60218-P ⁽¹⁾	96 (Galv.)			18/CFL	OBB (HID Options 35W-70W)	
H-60222-P ⁽¹⁾	BR47 (Rust)			26/32/42/CFL	For specs see pages 341-343.	
	BK01, GN20.			26/CFL		
	Upgraded Finishes		1-70/CFL			
	29, 66, 82, 92, 94, 97, 100, 103, 104, 105, 112, 113, 114, 117, 118, 119, 127, 128, 133, 134, 135, 136, 101, 102, 137, 139, 140, 121, 122, 123, 124.		DMB (Dimmable Ballast for CFL. Add to Part No.)			
	For finish specs see pages 344-348.		HID (High Intensity Discharge)			
			MH ⁽⁴⁾ (Metal Halide)			
			35/MH			
			50/MH			
			70/MH			
			100/MH			
			150/MH			
			175/MH			
			250/MH			
			HPS ⁽⁴⁾ (High Pressure Sodium)			
			50/HPS			
			70/HPS			
			100/HPS			
			150/HPS			
			250/HPS			

H-60118-P - 91 / PLY - T3 / 13/CFL - OBB - M

ORDER EXAMPLE
(USE THIS FORMAT TO PLACE ORDER)

- Notes:
- (1) H-60118-P and H-60218-P available for 200W Max INC, 42W Max CFL and 175W Max HID.
H-60122-P and H-60222-P available for 200W Max INC, 85W Max CFL and 250W Max HID.
 - (2) Acrylic is for INC.
Polycarbonate is for INC, CFL and HID.
 - (3) T3 is for Type 3 light distribution.
T5 is for Type 5 light distribution.
 - (4) Socket Bases: INC and 35W-175W HID are medium base. 250W HID is mogul Base. CFL is GX24Q.

Suitable for wet location.